


# risen

## n-type TOPCon

### HIGH PERFORMANCE BIFACIAL MODULE

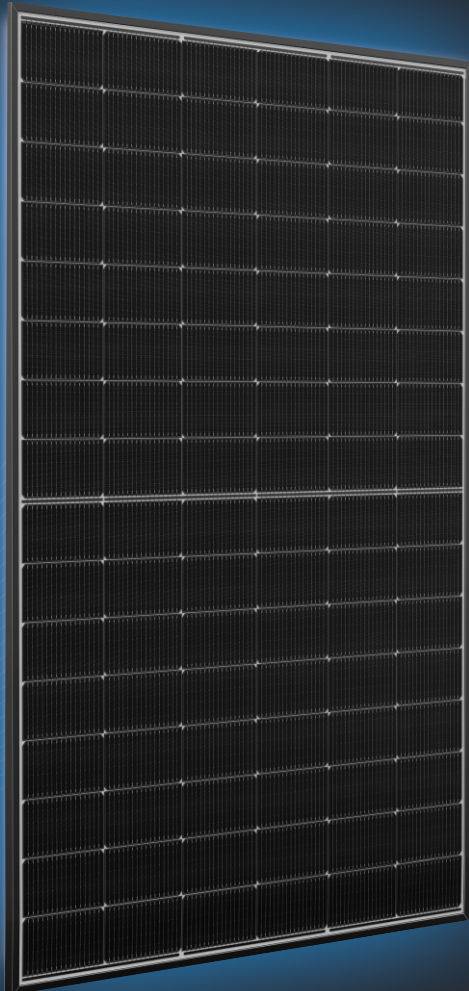

The module picture is for reference only




## RSM96-11-475BNDG

### KEY FEATURES

- Excellent suitability for residential and C&I applications
- Excellent power generation
- Excellent anti-LID & anti-PID performance
- Excellent temperature coefficient (Pmax): -0.29%/°C
- Excellent weak-light performance
- Excellent warranty assurance


### LINEAR PERFORMANCE WARRANTY

25 years Product Warranty / 30 years Linear Power Warranty

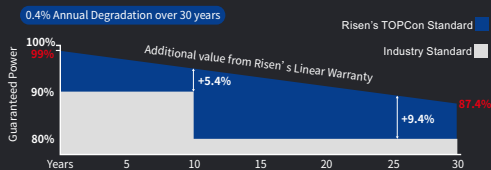

Only applicable to rooftop market in Australia and New Zealand

\* Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd



\* As there are different certification requirements in different markets, please contact your local Risen Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

## ELECTRICAL DATA (STC)

Model Type	RSM96-11-475BNDG
Rated Power in Watts-Pmax(Wp)	475
Open Circuit Voltage-Voc(V)	36.42
Short Circuit Current-Isc(A)	16.52
Maximum Power Voltage-Vmpp(V)	30.78
Maximum Power Current-Impp(A)	15.46
Module Efficiency (%) *	23.8

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.  
Bifacial factor: 80±5% \* Module Efficiency (%): Rounding to the nearest number

## ELECTRICAL DATA (BNPI)

Model Type	RSM96-11-475BNDG
Maximum Power-Pmax (Wp)	526
Open Circuit Voltage-Voc (V)	36.42
Short Circuit Current-Isc (A)	18.30
Maximum Power Voltage-Vmpp (V)	30.78
Maximum Power Current-Impp (A)	17.10

BNPI: Front side irradiance 1000W/m<sup>2</sup>, Rear side irradiance 135W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
Power measurement tolerance: ±3%

## Electrical characteristics with 10% rear side power gain

Total Equivalent power -Pmax (Wp)	523
Open Circuit Voltage-Voc(V)	36.42
Short Circuit Current-Isc(A)	18.17
Maximum Power Voltage-Vmpp(V)	30.78
Maximum Power Current-Impp(A)	17.01

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.


## MECHANICAL DATA

Solar cells	n-type TOPCon
Cell configuration	96 cells (6×8+6×8)
Module dimensions	1762×1134×30mm (69.37×44.65×1.18 in)
Weight	21.5kg (47.40 lb)
Superstrate	1.6mm(0.06 in), High Transmission, AR Coated Heat Strengthened Glass
Substrate	1.6mm(0.06 in), Heat Strengthened Glass
Frame	Anodized Aluminium Alloy, Black
J-Box	Potted, IP68, 1500VDC, 3 Schottky by pass diodes
Cables	4.0mm <sup>2</sup> , 1200mm(47.24 in) (+), 1200mm(47.24 in) (-), connector included, or customized length
Connector	MC4 EVO2/PV-SY02/Others(Standard MC4)
Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back), under certain installation method

## TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Pmax	-0.29%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	35A
Limiting Reverse Current	35A


## Dimensions of PV Module

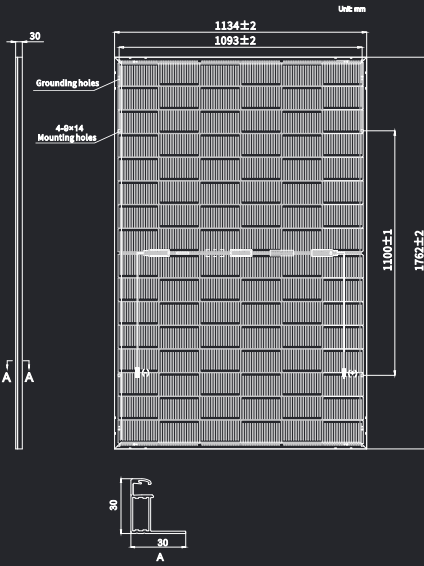


\*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

## RSM96-11-475BNDG

### I-V characteristics at different irradiances

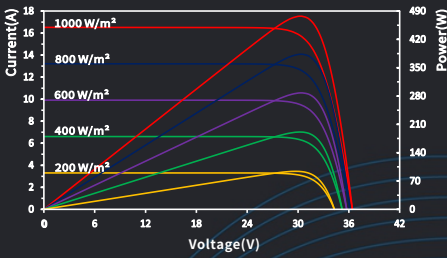

### I-V characteristics at different temperatures

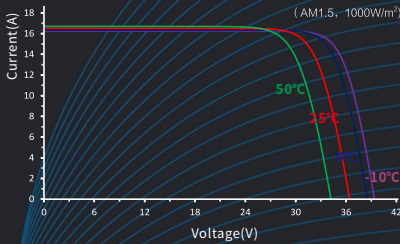

## PACKAGING CONFIGURATION

	40ft(HQ)	20ft
Number of modules per container	936	216
Number of modules per pallet	36	36
Number of pallets per container	26	6
Packaging box dimensions (LxWxH) in mm	1785×1110×1260	
Box gross weight[kg]	818	

**risen**

RISEN ENERGY CO., LTD.

Tashan Industry Zone, Meilin, Ninghai 315609, Ningbo | PRC

Tel: +86-574-59953239

Fax: +86-574-59953599

E-mail: marketing@risen.com

Website: www.risen.com

THE POWER OF RISING VALUE

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2026 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice. No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.